



Color Management Monitors

ColorEdge®



True to Creativity




True to Creativity

Precision beyond color.

Express your thoughts and inspirations exactly as you envision – ColorEdge helps to make that a reality. Each detail and nuance is realized in the final work, providing you an even greater satisfaction with your creations. Accurate color, consistent image quality, and ease of use are why EIZO's ColorEdge lineup gives creatives around the world the ability to express their true vision.

Let your imagination soar and your creativity blossom. Your passion will guide you and ColorEdge will ensure that you can express your ideas precisely as you have imagined.

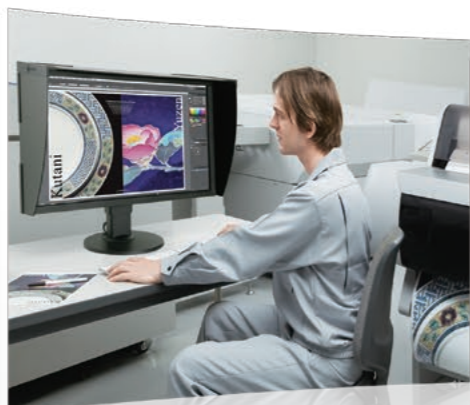

ColorEdge Quality for Achieving Your Creative Vision




Ease of Use

ColorEdge meets user needs with a wide range of monitors packed with features for creators of all levels. Designers and printers can rest assured that ColorEdge will ensure a smooth and consistent workflow through to the back-end. Video creators can take advantage of the features that many ColorEdge models include specifically for video creation. Those who want to enjoy working with digital photography can easily carry out color matching using ColorEdge. All of these features and more are included to ensure that ColorEdge is optimal for users' creative needs.




True Reproducibility

To achieve the most accurate color display, EIZO developed its own application-specific integrated circuit (ASIC) which is equipped in each ColorEdge monitor. With this ASIC, the gamma level of each monitor is adjusted at the factory to ensure that tones are displayed as intended without color banding.

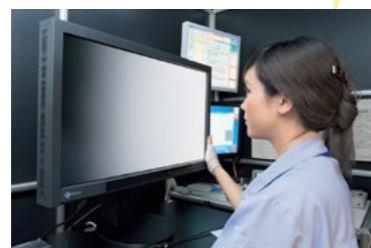

Long-Term Reliability

As more desktop LCD monitor brands outsource development and production to third parties, EIZO remains convinced that the best way to deliver the quality that our customers expect is to maintain an integrated approach. Each ColorEdge monitor is developed, manufactured, and quality-control tested in-house at EIZO's own factory. This gives us the confidence to back each ColorEdge monitor with the industry's only five-year manufacturer's warranty.

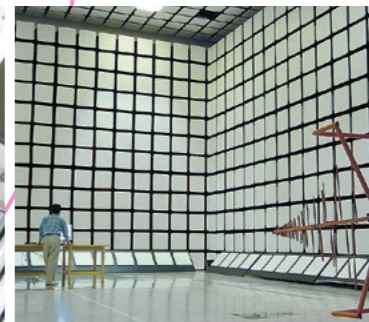



Post Production



Photography



Print




Design

For Professionals

Get the best in both color and convenience for the optimal creative workflow.

CG Series

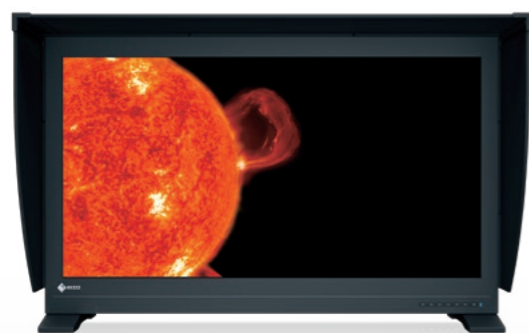


NEW PROMINENCE
4K CG3145 HDR 31.1"



NEW
4K CG319X HDR 31.1"



4K CG248-4K HDR 23.8"

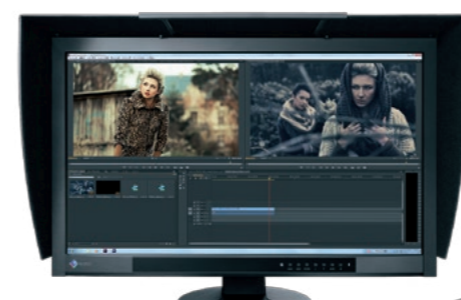

CG277 HDR 27"



CG2730 27"



CG247X HDR 24.1"



CG2420 24.1"



For Hobbyists and Prosumers

Create, edit, and enjoy photography, illustration, and more.

CS Series



NEW
CS2730 27"



NEW
CS2420 24.1"




CS230 23"

ColorEdge® Common Features

Vivid Colors Reproduced to Industry Standards


The wide color gamut of ColorEdge monitors reproduces almost the entire Adobe® RGB color space so images shot in Adobe® RGB will be displayed correctly. Photos of vibrant blue skies and lush green forests are reproduced faithfully in a way that monitors limited to an sRGB color space cannot display. The wide color gamut also ensures reproduction of almost the entire ISO-coated and US web-coated CMYK color spaces used in printing.

Not applicable to the CS230.

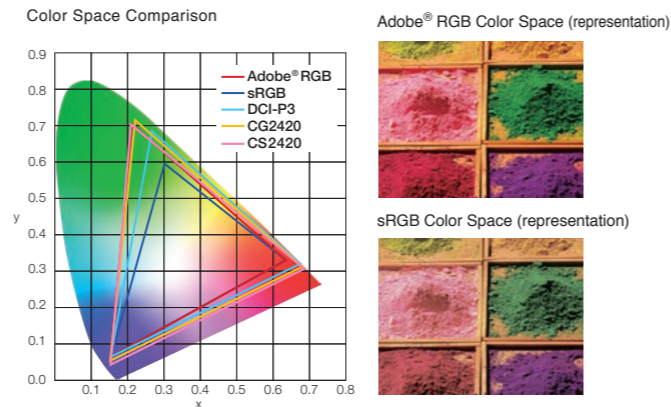

Adjusted at the Factory for Smooth Color Gradations


The gamma level for each ColorEdge monitor is adjusted at the factory by measuring the R, G, and B gamma values from 0 - 255, then using the monitor's 16-bit look-up-table (LUT) to select the 256 most appropriate tones and achieve the desired value. This ensures the smoothest color gradations in your images.

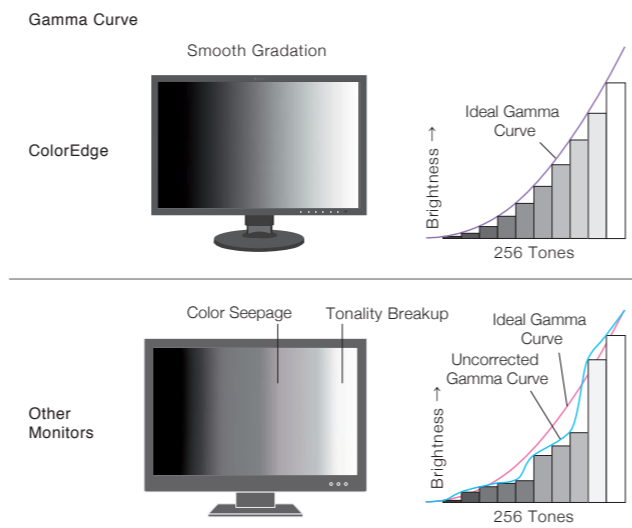

10-Bit Simultaneous Display


Using the DisplayPort or HDMI inputs, ColorEdge monitors offer 10-bit simultaneous color display* from a 16-bit look-up-table (24-bit for CG319X and CG3145) which means they can show more than one billion colors simultaneously. This is 64 times more colors than you get with 8-bit display, resulting in smooth color gradations and reduced Delta-E between two adjacent colors.

**A graphics board and software which support 10-bit output are necessary for 10-bit display. Equipment that supports Deep Color is necessary when using the HDMI input.*

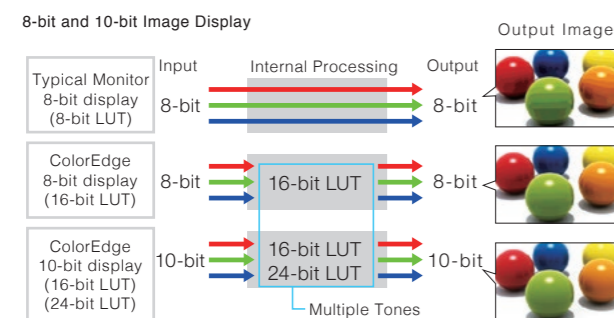


Wide Viewing Angles with IPS Panels

The 178° wide viewing angles afforded by the IPS panel technology allows two or more people to view the screen at once with little change in color or contrast.

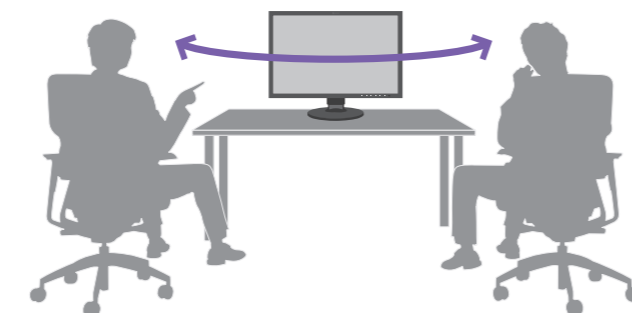

Uniformity from Corner to Corner

Fluctuations in brightness and chromaticity on different parts of the screen are a common trait of LCD monitors. To counteract this, ColorEdge monitors use EIZO's patented digital uniformity equalizer (DUE) technology to ensure stable image display and counterbalance the influences that a fluctuating temperature may have on color temperature and brightness.

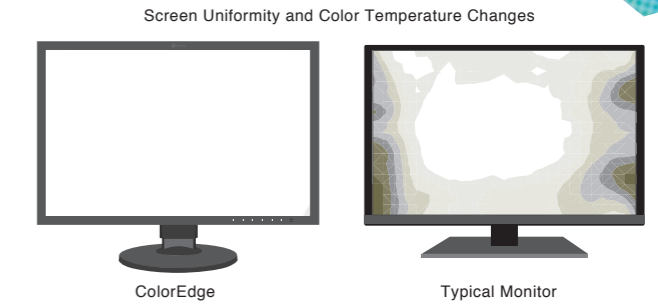


Ergonomic Stand for Comfort and Convenience

Adjust the screen to the most comfortable angle and reposition it to show your work to a colleague or client. The monitors come with a versatile stand that offer height, tilt, and swivel adjustments as well as portrait display.

Portrait mode not available with the CG319X stand. CG3145 comes with a non-adjustable stand.

Stand for CG2730, CS2730, CG2420, and CS2420

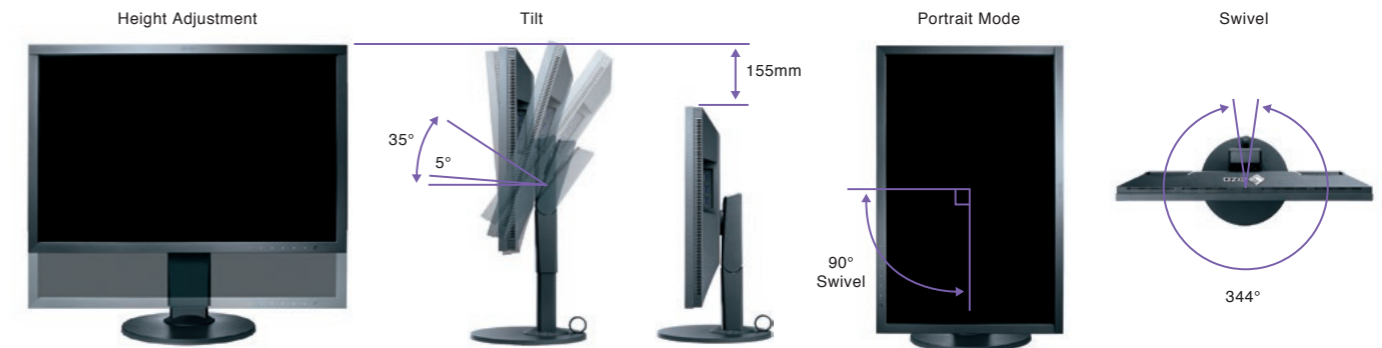

Commitment to Quality

5-Year Manufacturer's Warranty

ColorEdge monitors are backed by a manufacturer's 5-year warranty that covers all components including the LCD panel*. EIZO manufactures its products at its own factories to allow close control over production quality and ensure each monitor is built to last.

**Usage time is limited to 30,000 hours (10,000 hours for the CG319X and CG3145 LCD panel).*



Brightness and Color Warranty

The brightness and color of the CG Series is warranted for up to 10,000 hours* from the date of purchase.

**Monitor must be used within the recommended brightness of 120 cd/m² or less and the color temperature between 5000 - 6500 K. For CG3145, a brightness level of 800 cd/m² or more and a color temperature of 6500 K are warranted. For CG319X, a brightness level of 120 cd/m² or more and a color temperature of 5000 - 6500 K are warranted.*

Zero Bright Pixels


EIZO guarantees its ColorEdge monitors will be free from bright sub-pixels for six months from the date of purchase.



ColorEdge® Software Solutions

Color Management Software

ColorNavigator™ 6



To properly manage color in your work, it is necessary to ensure your monitor maintains consistent settings. ColorEdge monitors come bundled with EIZO's own color management software called ColorNavigator 6 which allows you to easily carry out calibration.


For the CS Series, an external calibration sensor is necessary to use ColorNavigator 6.

Quickly Calibrate to Preset or User-Assigned Values

Preset values for web contents, photography, and printing are included in the target values. Simply select the desired preset, click "Adjust", and ColorNavigator 6 will begin calibrating your monitor.


Experienced users can assign the desired values for brightness, white point, and gamma before calibrating for further improving color matching.

Main window

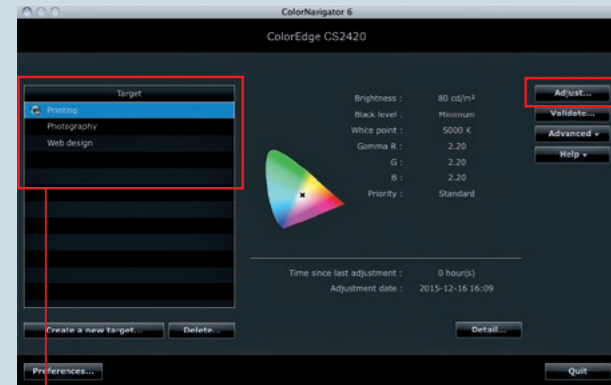


- For Printing**
Brightness: 80 cd/m² Color Temperature: 5,000K Gamma: 2.2 Color Space: Monitor Native
- For Creating Web Content**
Brightness: 80 cd/m² Color Temperature: 6,500K Gamma: 2.2 Color Space: sRGB
- For Checking and Editing Digital Photos**
Brightness: 100 cd/m² Color Temperature: 5,500K Gamma: 2.2 Color Space: Monitor Native

Manual Adjustment Screen

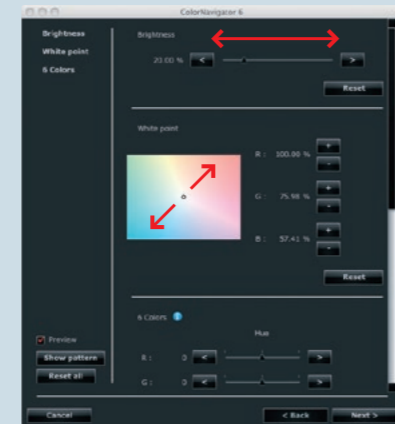

Easy Recalibration to Maintain Color Consistency

A monitor needs to be recalibrated at regular intervals to maintain color accuracy. ColorNavigator 6 includes a recalibration reminder that will appear after a certain number of user-determined hours. You can also be reminded without starting up ColorNavigator 6 by an LED on the monitor's front panel that lights up.

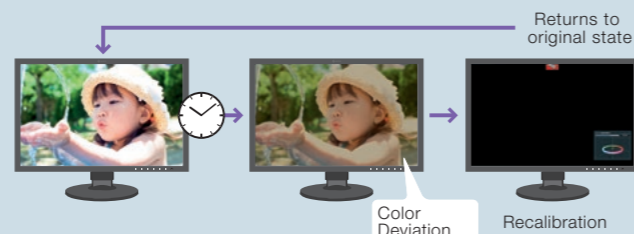


For the CS Series, an external sensor is necessary to carry out calibration.

Easy Screen-to-Print Color Matching Tool

QUICK COLOR MATCH



Even with all the right equipment, color matching can be a tedious process and achieving an accurate print takes a great deal of time. Quick Color Match greatly simplifies the process by automatically adjusting to EIZO's recommended monitor, retouching software, and printer settings. Simply drag and drop your photo and begin retouching and printing with no hassle.

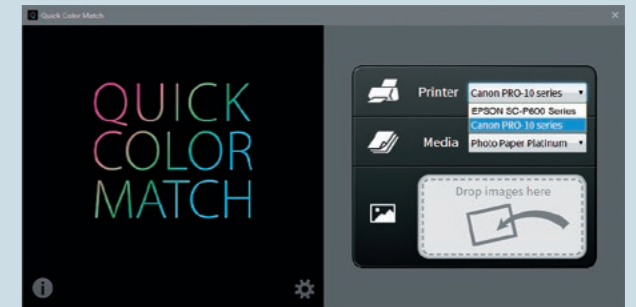

Automatic Adjustment to EIZO's Recommended Settings

Monitor Adjustment

Quick Color Match automatically adjusts your ColorEdge monitor's gain, brightness, gamma, and color space (Adobe® RGB) and creates a profile for these settings.

Retouching Software Settings

Dragging and dropping your photo to the Quick Color Match menu automatically opens Adobe® Photoshop and adjusts to EIZO's recommended settings based on the printer and paper being used.

Printer Settings

With either Canon Print Studio Pro or Epson Print Layout printer plugin installed, Quick Color Match automatically selects the print profile and color and soft proofing options recommended by EIZO.



Recommended Monitors for Quick Color Match



For a full list of supported monitors, printers, and software, visit www.eizoglobal.com/products/ce/qcm

What is Calibration?

Calibration is a method by which a monitor's display characteristics are adjusted to a target value using a special sensor. Software calibration modifies the signal from your video card to display more accurate color and can be carried out for conventional monitors. Hardware calibration controls the hardware of the monitor directly by utilizing the LUT (look-up-table) inside the monitor. This method offers higher precision and better gradation characteristics compared to software calibration. With ColorEdge and ColorNavigator 6, you can adjust the monitor's display directly through hardware calibration.

ColorNavigator 6 or Quick Color Match?

ColorNavigator 6 is for users who want to fine-tune the monitor's color accuracy and create custom profiles for editing a range of creative works. Quick Color Match offers quick, hassle-free color matching for users who want to streamline the process without worrying about technical details. Both solutions support most ColorEdge monitors so you can build the creative workflow that suits your needs.

For more information visit www.eizoglobal.com/library/management/qcm-cn

ColorEdge® CG Series Features

Built-In Sensors to Automate Your Workflow

CG Series monitors are equipped with a built-in sensor which can be set to calibrate the monitor automatically at designated times. This eliminates the need for a third-party calibration device and ensures your screen stays color-accurate. In addition, the CG319X features the latest sensor technology, which allows you to continue using the monitor even during recalibration. The sensor swings onto the screen, taking up minimal space, so your work remains uninterrupted.

Only CG319X can continue to be operated during recalibration. It is not recommended to carry out color-critical work during this process, as the screen's colors will be adjusted. CG3145 is not equipped with a built-in sensor.





Automatically calibrates while you work.

Stable Color in Just 3 Minutes

A typical monitor takes 30 minutes or more for its brightness, chromaticity, and tone characteristics to stabilize. The CG Series* takes a mere 3 minutes. Whether you are working in a studio or taking the monitor with you on location, you get reliable color display soon after turning the monitor on.

**The CG277 takes 7 minutes and CG3145 takes 30 minutes.*

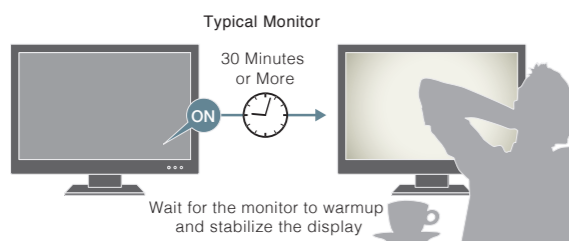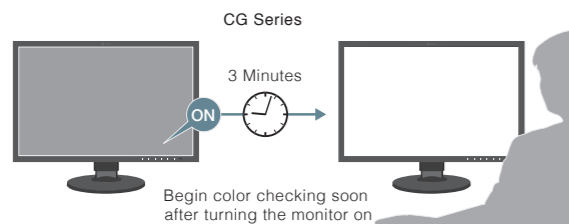

Light-Shielding Hood

The CG Series comes bundled with a shading hood that effectively prevents glare on the monitor's screen caused by ambient lighting. The CG Series* features newly designed shading hoods that attach to the monitor magnetically. This allows users to attach the hood quickly and easily without needing to connect separate parts.

**The CG277 comes with a non-magnetic hood.*



See How Other Devices Display Color with Media Emulation

ColorNavigator 6 emulates the color characteristics of other media devices* such as tablets, smartphones, notebook PCs, and other monitors. With a spectrophotometer, ColorNavigator 6 reads the emulated device's color patches as they appear in the web browser and creates an ICC profile. By using this profile with a ColorEdge monitor, content creators can see how their clients view color on their respective devices.

Media emulation is available for the CG Series only. Not applicable to the CG2730 or CG2420.



TÜV Color Accuracy and FograCert Softproof Monitor Certified

The ColorEdge CG Series Only CG319X can continue to be operated during recalibration. It is not recommended to carry out color-critical work during this process, as the screen's colors will be adjusted. CG3145 is not equipped with a built-in sensor. TÜV Rheinland's Color Accuracy (Quick Stability grade) certification. TÜV Rheinland Color Accuracy is the first quality and performance criterion to measure the color accuracy of display devices for multiple graphics fields such as photography, post production, design, and printing.




The monitors* are also recognized by Fogra as Class A FograCert Softproof Monitors. Using them in a FograCert Softproofing System ensures designers, print specifiers, and print producers can rely on the softproof for predictable and consistent results. In addition the CG247X is the first monitor to receive Idealliance's display-based soft proofing certification which confirms that the color stability, tone uniformity, and angular viewing consistency meets global industry standards for high quality proofs.

*For more information, visit:
<http://www.eizo.com/library/management/certifications/>
The CG2730 is under application for Fogra certification.

4K Resolution for Exceptional Detail


The Highest Pixel Density Yet

The CG248-4K offers the highest pixel density yet in the ColorEdge lineup at an astonishing 185 ppi for exceptionally smooth image display. The 4K UHD screen (3840 x 2160) makes it ideal for high-resolution photography or as a reference monitor for 4K video creation.

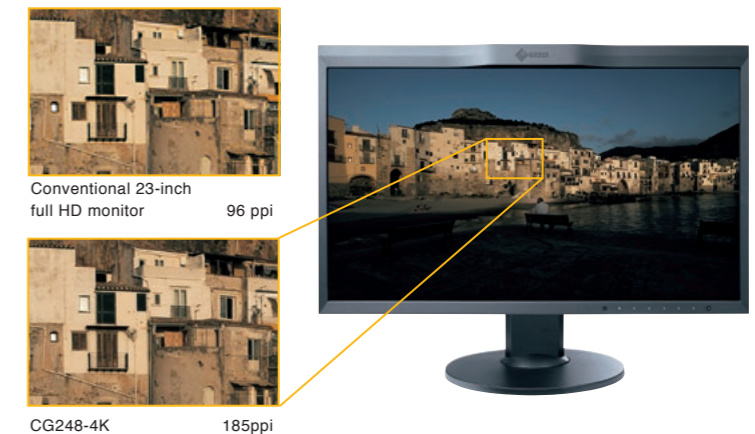


Quadruple the Resolution of Full HD

The CG319X and CG3145 display the DCI 4K standard (4096 x 2160) which is more than four times that of full HD (1920 x 1080). They are ideal for creating, editing, and referencing with 2D and 3D CGI, VFX, compositing, and color grading.

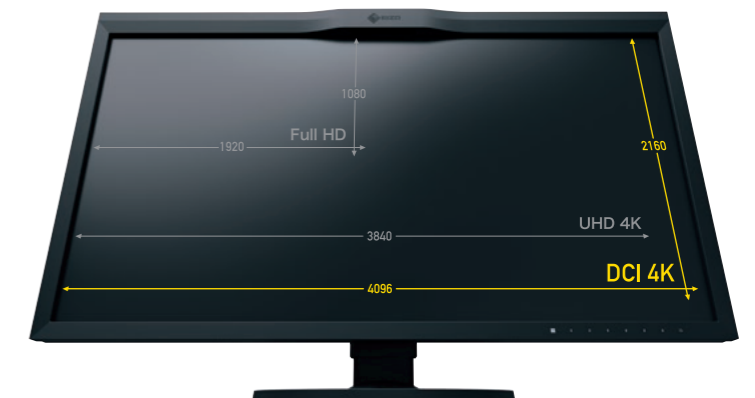

DCI 4K at 60 Hz with a Single Cable

The CG319X supports the DCI 4K resolution at 60 Hz with the DisplayPort 1.2 input or HDMI input. For the CG3145, 60 Hz is supported by both DisplayPort and HDMI inputs.

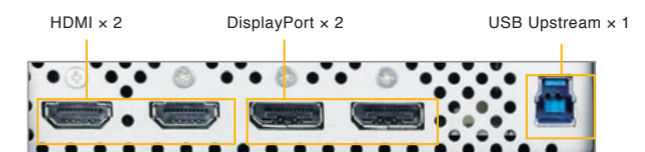

*For more information on compatibility and tips for a more comfortable 4K workstation, visit:
http://www.eizo.com/i/4K_guide/*


ColorEdge® CG Series Features

For Media and Entertainment

3D LUT for Accurate Color Display

A 3D LUT is included in the CG Series which adjusts colors individually on an RGB cubic table. With the bundled ColorNavigator 6 software's emulation function, the 3D LUT applies a film look to the image so creators can check how it will be seen by their audience. The 3D LUT also improves the monitor's additive color mixture (combination of RGB), which is a key factor in its ability to display neutral gray tones.

Not available with the CG2730 or CG2420.

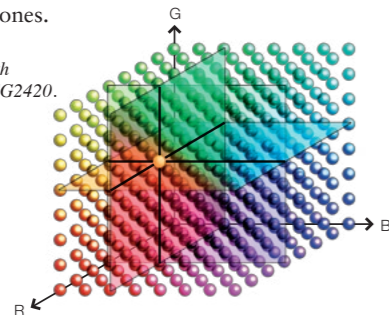

Multiple Preset Color Modes

CG Series monitors provide quick access to several broadcast-standard preset color modes via a button on the front of the monitor. The available modes are Rec. 709, EBU, SMPTE-C, and DCI. 4K models also include a preset mode for Rec. 2020. In addition, CG319X and CG3145 are equipped with HDR modes for both HLG and PQ gamma curves.


Not available with the CG2730 or CG2420.



I/P Conversion for Flicker-Free Display


The HDMI input of ColorEdge monitors supports I/P (interlace/progressive) conversion for converting the interlace signals from TV and video into progressive signals for flicker-free display.

Not available with the CS230.

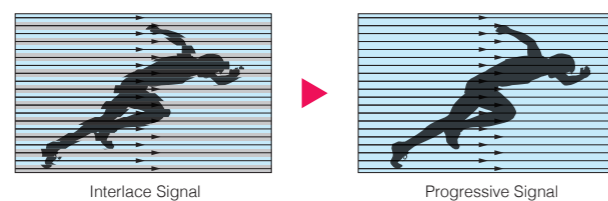

Rec. 709 Out of Gamut Warning

ColorEdge 4K monitors include a Gamut Warning preset. When selected, the areas of a Rec. 2020 image that cannot be reproduced using Rec. 709 are clearly indicated by converting them to shades of gray. An additional mode called Rec. 709 Clipping allows the editor to view Rec. 2020 images with the Rec. 709 color space, simulating how it would look to their audience in an HDTV environment.

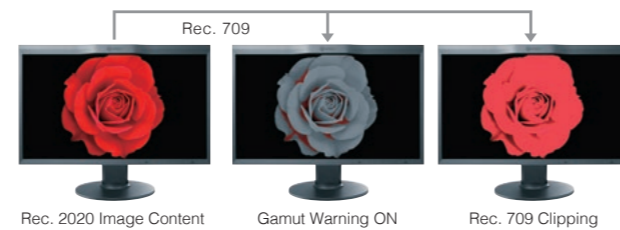

True Black Display

In compliance with the DCI standard, the ColorEdge CG319X, CG247X, CG2730, and CG2420 offer a high contrast ratio of 1500:1* for producing true blacks that are otherwise difficult to display on a typical LCD monitor.

When viewing the screen from an angle in a dimly lit room, dark tones typically appear washed out due to the display characteristics of LCD backlights. The CG Series is equipped with a retardation film which allows tones to retain their depth even when viewed from an angle.

*Typical value when DUE Priority is set to "Brightness".



Area Light for Dark Editing Rooms

RadiLight is a lighting solution that easily attaches directly to the monitor and shines a 6,500K light on the wall behind it. This reduces eye fatigue while not impacting the screen's visibility. It is also equipped with a spotlight for conveniently navigating your workspace.



True HDR

HDR (High Dynamic Range) is a range that approximates the human perception of color and light as content is shown on a display device. The ColorEdge PROMINENCE CG3145 achieves the 1000 cd/m² high brightness level (typical) needed for HDR content display. It also offers a typical contrast ratio of 1,000,000:1 for displaying true blacks.



HDR Workflow

In addition to the ColorEdge PROMINENCE CG3145 HDR reference monitor, EIZO offers HLG (hybrid log-gamma) and PQ (perceptual quantization) curves for many of its current CG Series monitors. The optimized gamma curves render images to appear more true to how the human eye perceives the real world compared to SDR (standard dynamic range).



Shooting		VFX		Compositing		Color Grading		
Shooting	VFX	Shooting	VFX	Shooting	VFX	Shooting	VFX	
VFX	Compositing	Compositing	Color Grading	Color Grading	Color Grading	Color Grading	Color Grading	
CG247X 24.1"	CG277 27"	CG248-4K 23.8"	CG319X 31.1"	CG3145 31.1"				
1920 x 1200	2560 x 1440	3840 x 2160	4096 x 2160	4096 x 2160				
Color Management Monitors with HDR Support							HDR Reference Monitor	

ColorEdge® CG Series Features

For Media and Entertainment

Quality Control Software

ColorNavigator™ NX



ColorNavigator NX offers quality control (QC) and asset management of client ColorEdge CG Series monitors. It covers calibration, emulation, built-in sensor correlation, and color mode settings. The software is most effectively used with EIZO's ColorNavigator Network solution to allow an administrator to perform QC operations on all ColorEdge monitors from a central location.

Network Color Management Software


ColorNavigator™ Network



ColorNavigator Network provides centralized quality control of ColorEdge CG Series monitors that have ColorNavigator NX installed. ColorNavigator Network is hosted on a secure cloud server. An administrator can set the color modes, schedule self-calibration, activate key lock to prevent unintended changes to color settings, register or adjust asset management settings, and import/export monitor settings.

ColorNavigator Network makes managing multiple monitors on a network simple and efficient.

For many studios, maintaining properly adjusted monitors had to be done manually, consuming a great deal of time.

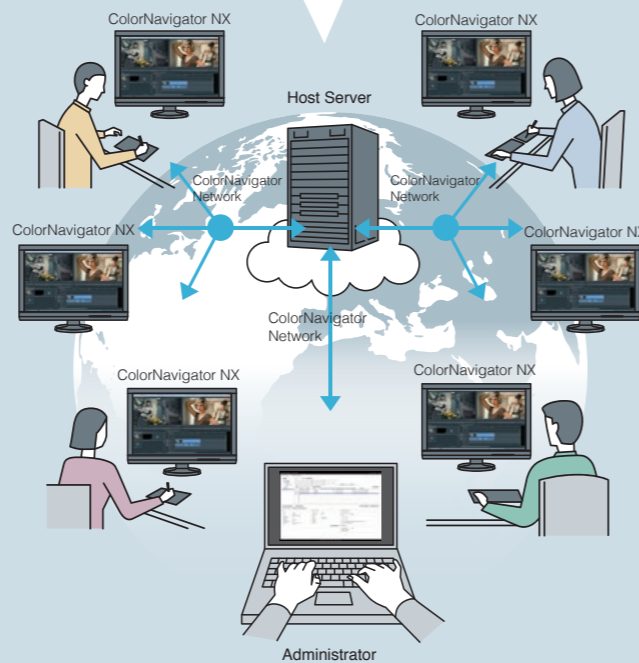

Benefits

- 1 Work Efficiency**
Significantly reduce your workload and annual maintenance costs.
- 2 Remote Color Management**
Unify color display on all ColorEdge monitors within your organization, even those that are located in other cities or countries.
- 3 Asset Management**
Smoothly manage assets from a single PC.

ColorEdge® CS Series - For Aspiring Creatives

NEW
CS2420
24" 1920×1200

NEW
CS2730
27" 2560×1440



Sleek, User-Friendly Design

Slimmer Bezels


The slim cabinet design features unobtrusive frames so you can focus more on the screen. Compared to the previous model, CS2420 and CS2730's bottom bezels are about 59% and 46% slimmer respectively. The CG2730's depth was also reduced by approximately 30% compared to its predecessor.

CS2420



59% slimmer


CS2730



30% slimmer

Seamless Electrostatic Switches

The flat design uses electrostatic switches on the front bezel in place of traditional buttons for seamless access to the monitor settings.

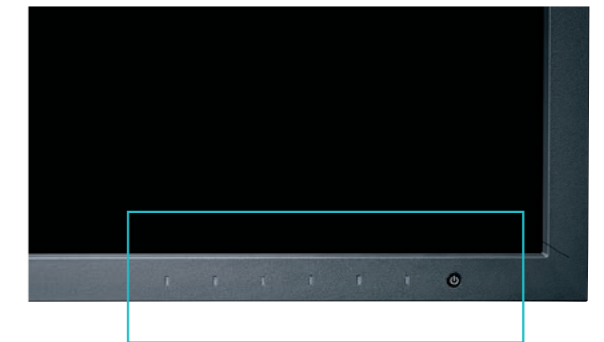

Built-In Handle for Easy Carrying

A carrying handle on the back of the monitors allows you to easily move them from one location to another. The weight of both monitors has been reduced significantly compared to the previous model to make them even easier to carry.



Easy-Access USB Ports

The monitors are equipped with three easy-to-access USB 3.0 ports, including one port for battery charging devices such as a smartphone.



QUICK COLOR MATCH


Use the CS Series with Quick Color Match software to easily achieve accurate prints.

See page 13 for details.



Innovative Solutions

Built-In Calibration Sensors

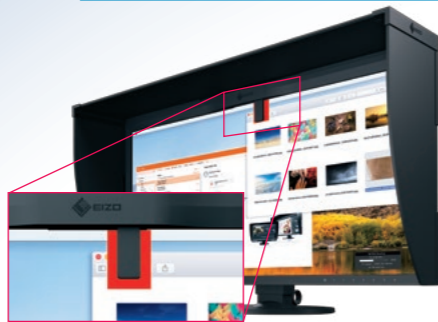


Automatically calibrates while you work

IP Decoding Monitors



In-House Optical Bonding

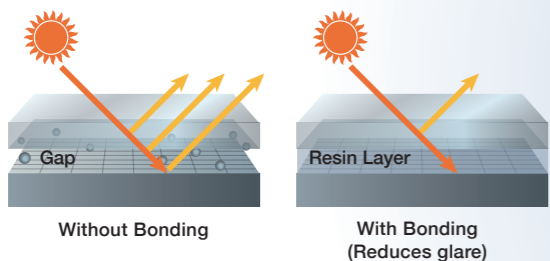

Market-Focused Cloud Solutions



Visual Technology Company



Celebrating the Past
Visualizing the Future



FlexScan

Business Enterprise



ColorEdge

Creative Work



CuratOR / RadiForce

Healthcare



DuraVision

Security & Surveillance / Maritime



Raptor / Re/Vue / SafeGuard

Air Traffic Control



FORIS

Home Entertainment

Integrated Approach



Global Reach



Customization



Quality Control



Research and Development




Manufacturing

Software for Improved Workflow



Use a single mouse across two PCs

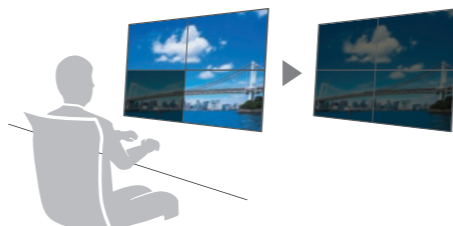


Synchronized adjustment of multiple monitors



Simplified CMS with automatic software and printer settings adjustment

Extensive Market Reach

Specifications



31.1" CG3145



31.1" CG319X



23.8" CG248-4K



27" CG277



24.1" CG247X



27" CG2730



24.1" CG2420



27" CS2730



24.1" CS2420



23" CS230

		4K				CG Series				CS Series						
Panel	Type	IPS	IPS	IPS	IPS	IPS	IPS	IPS	IPS	IPS	IPS	IPS	IPS	IPS	IPS	IPS
	Backlight	Wide-Gamut LED	Wide-Gamut LED	Wide-Gamut LED	Wide-Gamut LED	Wide-Gamut LED	Wide-Gamut LED	Wide-Gamut LED	Wide-Gamut LED	Wide-Gamut LED	Wide-Gamut LED	Wide-Gamut LED	Wide-Gamut LED	Wide-Gamut LED	Wide-Gamut LED	Wide-Gamut LED
	Size	31.1" / 78.9 cm	31.1" / 79 cm	23.8" / 60 cm	27" / 68 cm	24.1" / 61 cm	27" / 68.5 cm	24.1" / 61 cm	27" / 68.5 cm	27" / 68.5 cm	24.1" / 61 cm	27" / 68.5 cm	24.1" / 61 cm	23" / 58 cm	23" / 58 cm	23" / 58 cm
	Native Resolution	4096 x 2160 (17:9 aspect ratio)	4096 x 2160 (17:9 aspect ratio)	3840 x 2160 (16:9 aspect ratio)	2560 x 1440 (16:9 aspect ratio)	1920 x 1200 (16:10 aspect ratio)	2560 x 1440 (16:9 aspect ratio)	1920 x 1200 (16:10 aspect ratio)	2560 x 1440 (16:9 aspect ratio)	1920 x 1200 (16:10 aspect ratio)	2560 x 1440 (16:9 aspect ratio)	1920 x 1200 (16:10 aspect ratio)	1920 x 1200 (16:10 aspect ratio)	1920 x 1080 (16:9 aspect ratio)	1920 x 1080 (16:9 aspect ratio)	1920 x 1080 (16:9 aspect ratio)
	Viewable Image Size (H x V)	698.0 x 368.1 mm	698.0 x 368.1 mm	527 x 296.5 mm	527 x 296.5 mm	518.4 x 324 mm	596.7 x 335.6 mm	518.4 x 324 mm	596.7 x 335.6 mm	518.4 x 324 mm	596.7 x 335.6 mm	518.4 x 324 mm	596.7 x 335.6 mm	518.4 x 324 mm	509.2 x 286.4 mm	509.2 x 286.4 mm
	Pixel Pitch	0.170 x 0.170 mm	0.170 x 0.170 mm	0.137 x 0.137 mm	0.233 x 0.233 mm	0.270 x 0.270 mm	0.233 x 0.233 mm	0.270 x 0.270 mm	0.233 x 0.233 mm	0.270 x 0.270 mm	0.233 x 0.233 mm	0.270 x 0.270 mm	0.233 x 0.233 mm	0.265 x 0.265 mm	0.265 x 0.265 mm	0.265 x 0.265 mm
	Pixel Density	149ppi	149ppi	185ppi	109ppi	94ppi	109ppi	94ppi	109ppi	94ppi	109ppi	94ppi	109ppi	94ppi	94ppi	96ppi
	Grayscale Tones	DisplayPort, HDMI: 1,024 tones (a palette of 65 thousand tones)	DisplayPort, HDMI: 1,024 tones (a palette of 65 thousand tones)	DisplayPort, HDMI: 1,024 tones (a palette of 65 thousand)	DisplayPort, HDMI: 1,024 tones (a palette of 65 thousand)	DisplayPort, HDMI: 1,024 tones (a palette of 65 thousand)	DisplayPort, HDMI: 1,024 tones (a palette of 65 thousand)	DisplayPort, HDMI: 1,024 tones (a palette of 65 thousand)	DisplayPort, HDMI: 1,024 tones (a palette of 65 thousand)	DisplayPort, HDMI: 1,024 tones (a palette of 65 thousand)	DisplayPort, HDMI: 1,024 tones (a palette of 65 thousand)	DisplayPort, HDMI: 1,024 tones (a palette of 65 thousand)	DisplayPort, HDMI: 1,024 tones (a palette of 65 thousand)	DisplayPort, HDMI: 1,024 tones (a palette of 65 thousand)	DisplayPort, HDMI: 1,024 tones (a palette of 65 thousand)	DisplayPort, HDMI: 1,024 tones (a palette of 65 thousand)
	Display Colors	DisplayPort, HDMI: 1.07 billion (a 24-bit palette)	DisplayPort, HDMI: 1.07 billion (a 24-bit palette)	DisplayPort, HDMI: 1.07 billion (a palette of 278 trillion)	DisplayPort, HDMI: 1.07 billion (a palette of 278 trillion)	DisplayPort, HDMI: 1.07 billion (a palette of 278 trillion)	DisplayPort, HDMI: 1.07 billion (a palette of 278 trillion)	DisplayPort, HDMI: 1.07 billion (a palette of 278 trillion)	DisplayPort, HDMI: 1.07 billion (a palette of 278 trillion)	DisplayPort, HDMI: 1.07 billion (a palette of 278 trillion)	DisplayPort, HDMI: 1.07 billion (a palette of 278 trillion)	DisplayPort, HDMI: 1.07 billion (a palette of 278 trillion)	DisplayPort, HDMI: 1.07 billion (a palette of 278 trillion)	DisplayPort, HDMI: 1.07 billion (a palette of 278 trillion)	DisplayPort, HDMI: 1.07 billion (a palette of 278 trillion)	DisplayPort, HDMI: 1.07 billion (a palette of 278 trillion)
	Viewing Angles (H / V, typical)	178°, 178°	178°, 178°	178°, 178°	178°, 178°	178°, 178°	178°, 178°	178°, 178°	178°, 178°	178°, 178°	178°, 178°	178°, 178°	178°, 178°	178°, 178°	178°, 178°	178°, 178°
	Brightness (typical)	1000 cd/m ²	350 cd/m ²	350 cd/m ²	300 cd/m ²	400 cd/m ²	400 cd/m ²	350 cd/m ²	400 cd/m ²	350 cd/m ²	400 cd/m ²	350 cd/m ²	400 cd/m ²	350 cd/m ²	300 cd/m ²	300 cd/m ²
	Recommended Brightness for Calibration	—	120 cd/m ² or less	120 cd/m ² or less	120 cd/m ² or less	120 cd/m ² or less	120 cd/m ² or less	120 cd/m ² or less	120 cd/m ² or less	120 cd/m ² or less	120 cd/m ² or less	120 cd/m ² or less	120 cd/m ² or less	120 cd/m ² or less	120 cd/m ² or less	120 cd/m ² or less
	Contrast Ratio (typical)	1,000,000:1	1500:1	1000:1	1000:1	1500:1	1500:1	1000:1	1500:1	1000:1	1500:1	1000:1	1500:1	1000:1	1000:1	1000:1
	HDR Gamma	HLG, PQ curve	HLG, PQ curve	HLG, PQ curve (optional)	HLG, PQ curve (optional)	HLG, PQ curve (optional)	HLG, PQ curve (optional)	HLG, PQ curve (optional)	HLG, PQ curve (optional)	HLG, PQ curve (optional)	HLG, PQ curve (optional)	HLG, PQ curve (optional)	HLG, PQ curve (optional)	HLG, PQ curve (optional)	HLG, PQ curve (optional)	HLG, PQ curve (optional)
	Response Time (typical)	10 ms (Gray-to-gray)	9 ms (Gray-to-gray)	14 ms (gray-to-gray)	6 ms (gray-to-gray)	13 ms (gray-to-gray)	10 ms (gray-to-gray)	13 ms (gray-to-gray)	10 ms (gray-to-gray)	13 ms (gray-to-gray)	10 ms (gray-to-gray)	13 ms (gray-to-gray)	10 ms (gray-to-gray)	15 ms (gray-to-gray)	10.5 ms (gray-to-gray)	10.5 ms (gray-to-gray)
	Wide Gamut Coverage (typical)	DCI-P3: 99%	Adobe RGB 99%, DCI-P3: 98%	Adobe RGB: 99%, DCI-P3: 93%	Adobe RGB: 99%, DCI-P3: 93%	Adobe RGB: 99%, DCI-P3: 98%	Adobe RGB: 99%, DCI-P3: 98%	Adobe RGB: 99%, DCI-P3: 98%	Adobe RGB: 99%, DCI-P3: 98%	Adobe RGB: 99%, DCI-P3: 98%	Adobe RGB: 99%, DCI-P3: 98%	Adobe RGB: 99%, DCI-P3: 98%	Adobe RGB: 99%, DCI-P3: 98%	Adobe RGB: 99%	Adobe RGB: 99%	Adobe RGB: 99%
Video Signals	Input Terminals ⁴	DisplayPort x 2 (with HDCP), HDMI x 2 (HDCP, Deep Color)	DisplayPort x 2 (with HDCP), HDMI x 2 (HDCP, Deep Color)	DisplayPort x 2 (with HDCP), HDMI x 2 (with HDCP, Deep Color)	DisplayPort (with HDCP), HDMI (with HDCP, Deep Color)	DVI-D 24 pin (with HDCP), DisplayPort (with HDCP), HDMI (with HDCP, Deep Color)	DVI-D 24 pin (with HDCP), DisplayPort (with HDCP), HDMI (with HDCP, Deep Color)	DVI-D 24 pin (with HDCP), DisplayPort (with HDCP), HDMI (with HDCP, Deep Color)	DVI-D 24 pin (with HDCP), DisplayPort (with HDCP), HDMI (with HDCP, Deep Color)	DVI-D 24 pin (with HDCP), DisplayPort (with HDCP), HDMI (with HDCP, Deep Color)	DVI-D 24 pin (with HDCP), DisplayPort (with HDCP), HDMI (with HDCP, Deep Color)	DVI-D 24 pin (with HDCP), DisplayPort (with HDCP), HDMI (with HDCP, Deep Color)	DVI-D 24 pin (with HDCP), DisplayPort (with HDCP), HDMI (with HDCP, Deep Color)	DVI-D 24 pin (with HDCP), DisplayPort (with HDCP), HDMI (with HDCP, Deep Color)	DVI-D 24 pin (with HDCP), DisplayPort (with HDCP), HDMI (with HDCP, Deep Color)	DVI-D 24 pin (with HDCP), DisplayPort (with HDCP), HDMI (with HDCP, Deep Color)
	Digital Scanning Frequency (H / V)	DisplayPort: 25 - 137 kHz, 23 - 61 Hz HDMI: 15 - 136 kHz, 23 - 61 Hz	DisplayPort: 25 - 137 kHz, 23 - 61 Hz HDMI: 15 - 136 kHz, 23 - 61 Hz	DisplayPort: 24.5 - 137.5 kHz, 22.5 - 71.5 Hz HDMI: 14.5 - 135.5 kHz, 22.5 - 71.5 Hz	DisplayPort, DVI: 26 - 89 kHz, 23.75 - 63 Hz (VGA Text: 69 - 71 Hz) HDMI: 15 - 78 kHz, 23.75 - 61 Hz	DisplayPort, DVI: 26 - 89 kHz, 23 - 61 Hz (VGA Text: 69 - 71 Hz) HDMI: 15 - 78 kHz, 24 - 61 Hz (VGA Text: 69 - 71 Hz)	DisplayPort, DVI: 26 - 89 kHz, 23 - 61 Hz (VGA Text: 69 - 71 Hz) HDMI: 15 - 78 kHz, 24 - 61 Hz (VGA Text: 69 - 71 Hz)	DisplayPort, DVI: 26 - 89 kHz, 23 - 61 Hz (VGA Text: 69 - 71 Hz) HDMI: 15 - 78 kHz, 24 - 61 Hz (VGA Text: 69 - 71 Hz)	DisplayPort, DVI: 26 - 89 kHz, 23 - 61 Hz (VGA Text: 69 - 71 Hz) HDMI: 15 - 78 kHz, 24 - 61 Hz (VGA Text: 69 - 71 Hz)	DisplayPort, DVI: 26 - 89 kHz, 23 - 61 Hz (VGA Text: 69 - 71 Hz) HDMI: 15 - 78 kHz, 24 - 61 Hz (VGA Text: 69 - 71 Hz)	DisplayPort, DVI: 26 - 89 kHz, 23 - 61 Hz (VGA Text: 69 - 71 Hz) HDMI: 15 - 78 kHz, 24 - 61 Hz (VGA Text: 69 - 71 Hz)	DisplayPort, DVI: 26 - 89 kHz, 23 - 61 Hz (VGA Text: 69 - 71 Hz) HDMI: 15 - 78 kHz, 24 - 61 Hz (VGA Text: 69 - 71 Hz)	DisplayPort, DVI: 26 - 89 kHz, 23 - 61 Hz (VGA Text: 69 - 71 Hz) HDMI: 15 - 78 kHz, 24 - 61 Hz (VGA Text: 69 - 71 Hz)	DisplayPort, DVI: 26 - 89 kHz, 23 - 61 Hz (VGA Text: 69 - 71 Hz) HDMI: 15 - 78 kHz, 24 - 61 Hz (VGA Text: 69 - 71 Hz)	DisplayPort, DVI: 26 - 89 kHz, 23 - 61 Hz (VGA Text: 69 - 71 Hz) HDMI: 15 - 78 kHz, 24 - 61 Hz (VGA Text: 69 - 71 Hz)	DisplayPort, DVI: 26 - 89 kHz, 23 - 61 Hz (VGA Text: 69 - 71 Hz) HDMI: 15 - 78 kHz, 24 - 61 Hz (VGA Text: 69 - 71 Hz)
	Analog Scanning Frequency (H / V)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	26 - 68 kHz, 47.5 - 61 Hz
USB	Function	1 port for monitor control 3-port USB hub	1 port for monitor control 3-port USB hub	1 port for monitor control 3-port USB hub (including 1 USB battery charge port)	2 ports for monitor control 2-port USB hub	2 ports for monitor control 2-port USB hub	2 ports for monitor control 3-port USB hub	2 ports for monitor control 3-port USB hub	2 ports for monitor control 3-port USB hub	2 ports for monitor control 3-port USB hub	2 ports for monitor control 3-port USB hub	2 ports for monitor control 3-port USB hub	2 ports for monitor control 3-port USB hub	1 port for monitor control 3-port USB hub	2 ports for monitor control 2-port USB hub	2 ports for monitor control 2-port USB hub
	Standard	USB 3.0	USB 3.0	USB 3.0	USB 2.0	USB 2.0	USB 3.0	USB 3.0	USB 3.0	USB 3.0	USB 3.0	USB 3.0	USB 3.0	USB 3.0	USB 2.0	USB 2.0
Power	Power Requirements	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz	AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz	AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz
	Maximum Power Consumption	472 W	140 W	136 W	99 W	99 W	99 W	99 W	99 W	99 W	99 W	99 W	99 W	99 W	99 W	99 W
	Typical Power Consumption	267 W	52 W	52 W	43 W	43 W	22 W	33 W	20 W	44 W	26 W	21 W	21 W	21 W	21 W	21 W
	Power Save Mode	Less than 1.2 W	Less than 1.2 W	Less than 9 W	Less than 0.7 W	Less than 0.7 W	Less than 0.6 W	Less than 0.6 W	Less than 0.7 W	Less than 0.6 W	Less than 0.6 W	Less than 0.6 W	Less than 0.6 W	Less than 0.6 W	Less than 0.5 W	Less than 0.5 W
	Standby Mode	Less than 0.7 W	Less than 1.2 W	Less than 9 W	Less than 0.5 W	Less than 0.5 W	Less than 0.6 W	Less than 0.6 W	Less than 0.6 W	Less than 0.6 W	Less than 0.6 W	Less than 0.6 W	Less than 0.6 W	Less than 0.6 W	Less than 0.5 W	Less than 0.5 W
	Power Management	Power Save (DisplayPort: Rev. 1.2a)	Power Save (DisplayPort: Rev. 1.2a)	Power Save (DisplayPort 1.2)	Power Save (DisplayPort 1.1a, DVI DMPM)	Power Save (DisplayPort 1.1a, DVI DMPM)	Power Save (DisplayPort Version 1.1a, DVI DMPM)	Power Save (DisplayPort Version 1.1a, DVI DMPM)	Power Save (DisplayPort Version 1.1a, DVI DMPM)	Power Save (DisplayPort Version 1.1a, DVI DMPM)	Power Save (DisplayPort Version 1.1a, DVI DMPM)	Power Save (DisplayPort Version 1.1a, DVI DMPM)	Power Save (DisplayPort Version 1.1a, DVI DMPM)	Power Save (DisplayPort Version 1.1a, DVI DMPM)	Power Save (VESA DPM, DisplayPort 1.1a, DVI DMPM)	Power Save (VESA DPM, DisplayPort 1.1a, DVI DMPM)
Features & Functions	Brightness Stabilization	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	Digital Uniformity Equalizer	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	Preset Modes	Color Mode (REC2020, REC709, DCI, PQ_REC2100, PQ_REC709, PQ_DCI, HLG_REC2100, Calibration)	Color Mode (REC2020, REC709, DCI, PQ_REC2100, PQ_REC709, PQ_DCI, HLG_REC2100, Adobe RGB, sRGB, Calibration)	Color Mode (Custom, Adobe RGB, sRGB, REC709, EBU, SMPTE-C, DCI, REC2020, Calibration)	Color Mode (Custom, Adobe RGB, sRGB, REC709, EBU, SMPTE-C, DCI, Calibration)	Color Mode (Custom, Adobe RGB, sRGB, REC709, EBU, SMPTE-C, DCI, Calibration)	Color Mode (Custom, Adobe RGB, sRGB, Calibration)	Color Mode (Custom, Adobe RGB, sRGB, Calibration)	Color Mode (Custom, Adobe RGB, sRGB, Calibration)	Color Mode (Custom, Adobe RGB, sRGB, Calibration)	Color Mode (Custom, Adobe RGB, sRGB, Calibration)	Color Mode (Custom, Adobe RGB, sRGB, Calibration)	Color Mode (Custom, Adobe RGB, sRGB, Calibration)	Color Mode (Custom, Adobe RGB, sRGB, Calibration)	Color Mode (User1, User2, User3, Paper, sRGB, Calibration)	Color Mode (User1, User2, User3, Paper, sRGB, Calibration)
	Built-in Calibration Sensor	—	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	—	—	—
	Built-in Correction Sensor	—	—	—	—	—	—	—	—	—	—	—	—	—	—	Yes
Physical Specifications	Dimensions (Landscape, W x H x D)	757 x 488 x 236.5 mm	735 x 434 - 588 x 290 mm	553 x 394 - 544 x 245 mm	646 x 425 - 576.5 x 281.5 mm	575 x 417 - 545 x 245.5 mm	638 x 404.1 - 559.1 x 245 mm	554.4 x 396 - 551 x 245 mm	638 x 404.1 - 559.1 x 245 mm	554.4 x 396 - 551 x 245 mm	638 x 404.1 - 559.1 x 245 mm	554.4 x 396 - 551 x 245 mm	638 x 404.1 - 559.1 x 245 mm	554.4 x 396 - 551 x 245 mm	544 x 372.5 - 526.5 x 245.5 mm	544 x 372.5 - 526.5 x 245.5 mm
	Dimensions (Portrait, W x H x D)	—	—	345 x 564 - 642 x 245 mm	402 x 671 - 704 x 281.5 mm	398 x 594.5 - 642.5 x 245.5 mm	378.2 x 649 - 689 x 248 mm	362 x 565.4 - 647.2 x 245 mm	378.2 x 649 - 689 x 248 mm	362 x 565.4 - 647.2 x 245 mm	378.2 x 649 - 689 x 248 mm	362 x 565.4 - 647.2 x 245 mm	378.2 x 649 - 689 x 248 mm	362 x 565.4 - 647.2 x 245 mm	353 x 563.5 - 627 x 245.5 mm	353 x 563.5 - 627 x 245.5 mm
	Dimensions (Without Stand, W x H x D)	—	735 x 423 x 71.5 mm	553 x 345 x 64 mm	646 x 402 x 92 mm	575 x 345 x 75 mm	638 x 378.2 x 64 mm	554.4 x 362 x 64 mm	638 x 378.2 x 64 mm	554.4 x 362 x 64 mm	638 x 378.2 x 64 mm	554.4 x 362 x 64 mm	638 x 378.2 x 64 mm	554.4 x 362 x 64 mm	544 x 353 x 75 mm	544 x 353 x 75 mm
	Dimensions (Landscape with Hood, W x H x D)	778 x 498.5 x 355.6 mm	754.4 x 443.6 - 597.6 x 381.5 mm	572.4 x 403 - 553 x 340 mm	653 x 432.5 - 584 x 379.5 mm	596 x 427.8 - 555.8 x 356.7 - 380 mm	657.4 x 413.8 - 568.8 x 336 mm	572.4 x 405 - 560 x 336 mm	657.4 x 413.8 - 568.8 x 336 mm	572.4 x 405 - 560 x 336 mm	657.4 x 413.8 - 568.8 x 336 mm	572.4 x 405 - 560 x 336 mm	657.4 x 413.8 - 568.8 x 336 mm	572.4 x 405 - 560 x 336 mm	572.4 x 405 - 560 x 336 mm	572.4 x 405 - 560 x 336 mm
	Dimensions (Portrait with Hood, W x H x D)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
	Net Weight	25.8 kg / 56.9 lbs	12.4 kg / 27.3 lbs	8.5 kg / 18.7 lbs	12.8 kg / 28 lbs	8.9 kg / 19.6 lbs	8.9 kg / 19.6 lbs	7.8 kg / 17.2 lbs	8.9 kg / 19.6 lbs	7.8 kg / 17.2 lbs	8.9 kg / 19.6 lbs	7.8 kg / 17.2 lbs	8.9 kg / 19.6 lbs	7.8 kg / 17.2 lbs	7.5 kg / 16.5 lbs	7.5 kg / 16.5 lbs
	Net Weight (Without Stand)	—	8.3 kg / 18.3 lbs	5.7 kg / 12.6 lbs	8.8 kg / 19.4 lbs	6.2 kg / 13.7 lbs	6.1 kg / 13.4 lbs	5.0 kg / 11.0 lbs	6.1 kg / 13.4 lbs	5.0 kg / 11.0 lbs	6.1 kg / 13.4 lbs	5.0 kg / 11.0 lbs	6.1 kg / 13.4 lbs	5.0 kg / 11.0 lbs	4.8 kg / 10.6 lbs	4.8 kg / 10.6 lbs
	Net Weight (With Hood)	26.7 kg / 58.9 lbs	13.3 kg / 2													

Accessories

Monitor Hoods

Monitor hoods are bundled with the CG Series and optional for the CS Series.



CH2700

Supported Models: CG2730, CS2730

CH2400

Supported Models: CG248-4K, CG2420, CS2420

CH6

Supported Models: CS230

CH5

Supported Models: CG277

Area Light

RadiLight™

Easily attachable 6500 K light that relieves eye fatigue when viewing your monitor in a dark room.

Supported Models: CG318-4K, CG248-4K, CG277, and CG247X



Calibration Device

EX3

Adjust CS Series monitors to your ideal settings with this external calibration device.



Monitor Cleaning Kit

ScreenCleaner™

Wipe away dust and fingerprints with this screen cleaner kit. Includes pump spray and cloth. Bundled with the CG series.



Software

Screen-to-Print Color Matching Tool

QUICK COLOR MATCH

Easy color matching tool for simplifying monitor, retouching software, and printer settings.



Color Management Software

ColorNavigator® 6

Color management software for simple calibration and predictable color results for photo and print.



Quality Control Software

ColorNavigator® NX

Quality control software for management of client ColorEdge monitors.



Network Color Management Software

ColorNavigator Network

Network color management software for centralized quality control of ColorEdge monitors on a network.



Software System Requirements (as of April 2018)
See www.eizoglobal.com for the latest information.

	ColorNavigator 6		ColorNavigator NX		
	Mac	Windows	Mac	Windows	Linux
Compatible OS	macOS High Sierra (10.13) / macOS Sierra / OS X El Capitan (10.11) / Yosemite (10.10) / Mavericks (10.9) / Mountain Lion (10.8)	Windows 10 (32-bit, 64-bit) / 8.1 (32-bit, 64-bit) / 7 (32-bit, 64-bit)	macOS High Sierra (10.13) / macOS Sierra / OS X El Capitan (10.11) / Yosemite (10.10) / Mavericks (10.9) / Mountain Lion (10.8) / Mac OS X 10.7.5	Windows 10 (32-bit, 64-bit) / 8.1 (32-bit, 64-bit) / 7 (32-bit, 64-bit)	Red Hat Enterprise Linux Workstation 6
Additional Requirements	<ul style="list-style-type: none"> Apple Mac that fulfills the OS system requirements Two or more available USB ports Minimum 16.7 million display colors Recommended minimum resolution of 1024 x 768 	<ul style="list-style-type: none"> PC that fulfills the OS system requirements 			
Supported Monitors	ColorEdge CG Series (excluding CG3145) ColorEdge CS Series		ColorEdge CG Series		

Compatible Measurement Devices (as of April 2018)
See www.eizoglobal.com for the latest information.

	ColorNavigator 6		ColorNavigator NX	
	Supported Sensors	Notes	Supported Sensors	Notes
X-Rite	i1 Monitor, i1 Pro, i1 Pro2, i1 Display, i1 Display 2, i1 Display 3, i1 Display Pro	Ambient light adjustment is not available with the i1 Monitor and i1 Display.	i1 Monitor, i1 Pro, i1 Pro 2, i1 Display 3, i1 Display Pro	
	ColorMunki PHOTO, ColorMunki DESIGN	ColorMunki Display and ColorMunki Smile are not supported.	ColorMunki PHOTO, ColorMunki DESIGN	ColorMunki Display and ColorMunki Smile are not supported. Not compatible with Linux
Datacolor	Spyder 3, Spyder 4, Spyder 5	Ambient light adjustment and gray balance prioritizing function are not available.	Spyder 3, Spyder 4, Spyder 5	Not compatible with Linux
EIZO	EX1, EX2, EX3	Ambient light adjustment and gray balance prioritizing function are not available.	EX1, EX2, EX3	Not compatible with Linux
	Built-in calibration sensor	Ambient light adjustment and paper white measurement are not available and therefore calibration using such measured values is not available.	Built-in calibration sensor	
basICColor	DISCUS		DISCUS	Not compatible with Linux
Colorimetry Research	CR-100, CR-250	Ambient light adjustment is not available.	CR-100, CR-250	
Klein	K-10, K10-A	Ambient light adjustment and paper white measurement are not available.	K-10	
Konica Minolta	CA-210, CA-310, CS-1000, CS-1000A, CS-2000, CS-2000A, CS-200	Ambient light adjustment and paper white measurement are not available. Driver not included with ColorNavigator 6.	CA-210, CA-310, CS-1000, CS-1000A, CS-2000, CS-2000A, CS-200	Not compatible with Mac OS X or Linux Driver not included with ColorNavigator NX
Photo Research	PR-655, PR-680	Ambient light adjustment and paper white measurement are not available.	PR-655, PR-680	
JETI			Specbos 1211, Spectral 1501	

EIZO Corporation

153 Shimokashiwano, Hakusan, Ishikawa 924-8566 Japan
Phone +81-76-277-6792 Fax +81-76-277-6793
www.eizoglobal.com

All product names are trademarks or registered trademarks of their respective companies. ColorEdge and EIZO are registered trademarks of EIZO Corporation. Adobe product screenshots reprinted with permission from Adobe Systems Incorporated. Specifications are subject to change without notice.

The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing, LLC in the United States and other countries.

Copyright © 2018 EIZO Corporation. All rights reserved.
Printed in Japan, 3, 2018,4K (160208c)